




# TWIST-NUT CHANNEL NUT

EASILY INSERT TWIST-NUT ANYWHERE ALONG THE CHANNEL



## Properly Secures Strut Fittings

- Increased Efficiency
- Nut Stays in Place During Install Without Use of Spring
- No Springs Slipping Through Slots
- No Springs Getting Tangled in the Box
- Bolt Sizes  $\frac{1}{4}$ "-20,  $\frac{3}{8}$ "-16, &  $\frac{1}{2}$ "-13
- Standard Finish: Electro-Galvanized (EG)

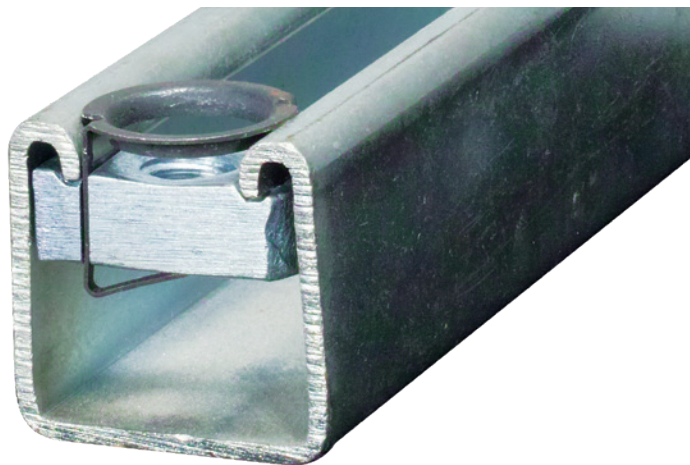


ZSIINC.COM | 800-323-7053

ZSi & Wesanco are part of the Ideal Tridon Group. Learn more at [idealtridongroup.com](http://idealtridongroup.com)




**Twist-Nut Channel Nut**



Part No.	Size	Thickness
W2-4TN	1/4" - 20	1/4" (6mm)
W2-6TN	3/8" - 16	3/8" (10mm)
W2-8TN	1/2" - 13	1/2" (13mm)

**No Tangled Springs**

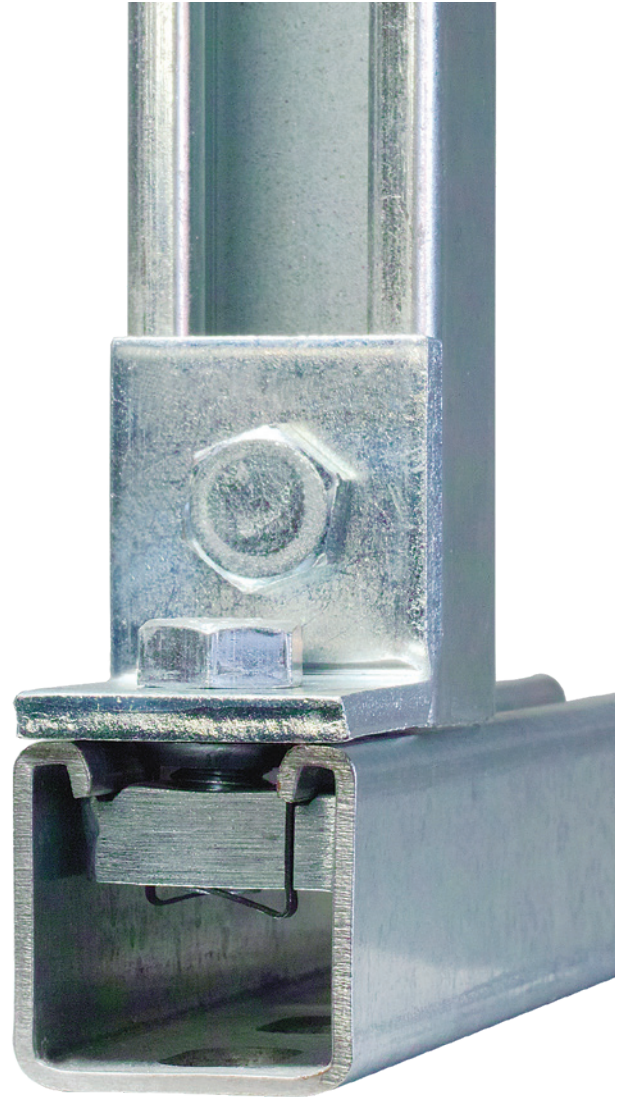

**Easy Install**

**Step 1: Insert**



**Step 2: Twist**



**Step 3: Done**

